



JDB Metric Cylindrical Oiles Bearing

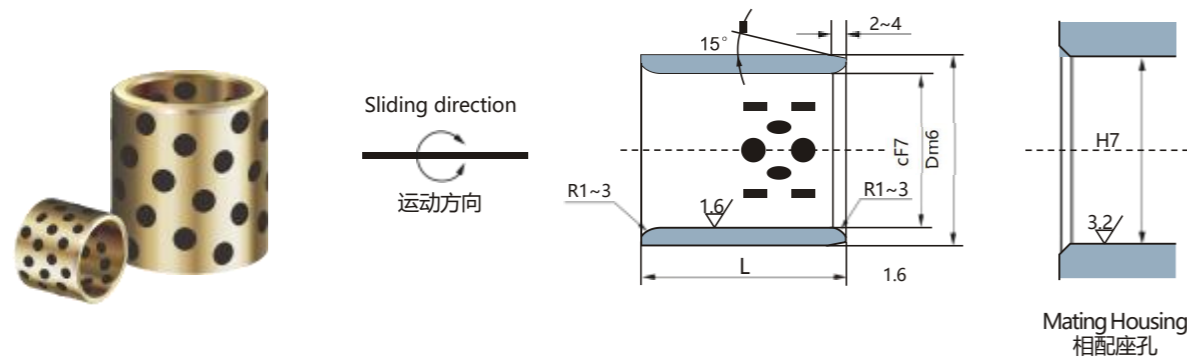

| I.D. ∅ d 内径 F7 | | O.D. ∅ D 外径 m6 | | L ^{-0.1} / _{-0.3} | | | | | | | |
|-------------------|------------------|-------------------|------------------|-------------------------------------|--------|--------|--------|--------|--------|--------|--|
| | | | | 8 | 10 | 12 | 15 | 16 | 19 | 20 | |
| 6 | +0.022 +0.010 | 10 | +0.015 +0.006 | 061008 | 061010 | 061012 | | | | | |
| 8 | +0.028 +0.013 | 12 | +0.018 +0.007 | 081208 | 081210 | 081212 | 081215 | | | | |
| 10 | +0.034 +0.016 | 14 | | 101408 | 101410 | 101412 | 101415 | | | 101420 | |
| 12 | | 18 | 121808 | 121810 | 121812 | 121815 | 121816 | 121819 | 121820 | | |
| 13 | | 19 | | 131910 | 131912 | 131915 | | | 131920 | | |
| 14 | | 20 | | 142010 | 142012 | 142015 | | | 142020 | | |
| 15 | | 21 | | 152110 | 152112 | 152115 | 152116 | | 152120 | | |
| 16 | | 22 | | 162210 | 162212 | 162215 | 162216 | 162219 | 162220 | | |
| 17 | | 23 | | | | 172315 | | | | | |
| 18 | | 24 | | 182410 | 182412 | 182415 | 182416 | | 182420 | | |
| 19 | | 26 | | | | 192615 | | | 192620 | | |
| 20 | | 28 | | | 202810 | 202812 | 202815 | 202816 | 202819 | 202820 | |
| | 30 | | | 203010 | 203012 | 203015 | 203016 | | 203020 | | |
| 22 | 32 | | | | 223212 | 223215 | | | 223220 | | |
| 25 | 33 | | | | 253312 | 253315 | | | 253320 | | |
| | 35 | | | | 253512 | 253515 | 253516 | | 253520 | | |
| 28 | 38 | | | | | | 283816 | | 283820 | | |
| 30 | 40 | | | | 303812 | 303815 | | | 303820 | | |
| | 40 | | | | 304012 | 304015 | | | 304020 | | |
| 32 | 42 | | | | | | | | 324220 | | |
| 35 | 44 | | | | | | | | 354420 | | |
| | 45 | | | | | | | | 354520 | | |
| 38 | 48 | | | | | | | | | | |
| 40 | 50 | | | | | 405015 | | | 405020 | | |
| | 55 | | | | | 405515 | | | | | |
| 45 | 56 | | | | | | | | | | |
| | 60 | | | | | | | | | | |

JDB Metric Cylindrical Oiles Bearing

| | |
|----------|--------------------|
| Material | CuZn25Al5+Graphite |
| 材质 | 高力黄铜+石墨 |

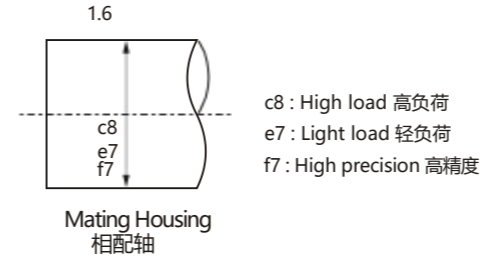


Unit(单位): mm

| L ^{-0.1} / _{-0.3} | | | | | | | | I.D. After Press-Fitting 压装后内孔 | JTW 适用垫片 | I.D. ∅ d 内径 |
|-------------------------------------|--------|--------|--------|--------|--------|--------|--------|-----------------------------------|-------------|----------------|
| 25 | 30 | 35 | 40 | 50 | 60 | 70 | 80 | | | |
| | | | | | | | | +0.019 +0.007 | — | 6 |
| | | | | | | | | +0.025 +0.010 | — | 8 |
| | | | | | | | | +0.031 +0.013 | 10 | 10 |
| 121825 | 121830 | | | | | | | +0.030 +0.012 | 12 | 12 |
| 131925 | 131930 | | | | | | | | 13 | 13 |
| 142025 | 142030 | | | | | | | | 14 | 14 |
| 152125 | 152130 | 152135 | | | | | | | 15 | 15 |
| 162225 | 162230 | 162235 | | | | | | | 16 | 16 |
| | | | | | | | | | 18 | 17 |
| 182425 | 182430 | 182435 | | | | | | | 18 | 18 |
| | | | | | | | | | 20 | 19 |
| 202825 | 202830 | 202835 | 202840 | 202850 | | | | | 20 | 20 |
| 203025 | 203030 | 203035 | 203040 | 203050 | | | | | 20 | 20 |
| 223225 | | | | | | | | 25 | 22 | |
| 253325 | 253330 | 253335 | 253340 | 253350 | 253360 | | | 25 | 25 | |
| 253525 | 253530 | 253535 | 253540 | 253550 | 253560 | | | 25 | 25 | |
| 283825 | 283830 | | 283840 | | | | | 30 | 28 | |
| 303825 | 303830 | 303835 | 303840 | 303850 | 303860 | | | 30 | 30 | |
| 304025 | 304030 | 304035 | 304040 | 304050 | 304060 | | | 30 | 30 | |
| | 324230 | | 324240 | | | | | 35 | 32 | |
| 354425 | 354430 | 354435 | 354440 | 354450 | 354460 | | | 35 | 35 | |
| 354525 | 354530 | 354535 | 354540 | 354550 | 354560 | | | 35 | 35 | |
| | | | 384840 | | | | | 40 | 38 | |
| 405025 | 405030 | 405035 | 405040 | 405050 | 405060 | 405070 | 405080 | 40 | 40 | |
| | 405530 | 405535 | 405540 | 405550 | 405560 | | | 40 | 40 | |
| | 455530 | 455535 | 455540 | 455550 | 455560 | | | 45 | 45 | |
| | 455630 | 455635 | 455640 | 455650 | 455660 | | | 45 | | |
| | 456030 | 456035 | 456040 | 456050 | 456060 | 456070 | 456080 | 45 | | |

※压入后内孔公差值做参考。
The ID tolerance after fitting is for reference


JDB Metric Cylindrical Oiles Bearing

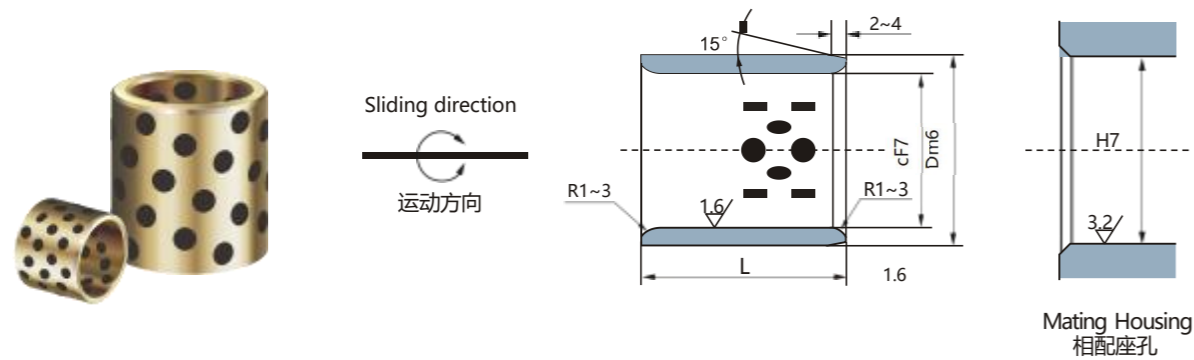

| I.D. ∅ d 内径 F7 | | O.D. ∅ D 外径 m6 | L ^{-0.1} _{-0.3} | | | | | | | |
|-------------------|------------------|-------------------|-----------------------------------|--------|---------|--------|----------|----------|----------|--|
| | | | 20 | 30 | 35 | 40 | 50 | 60 | 70 | |
| 50 | +0.050 +0.025 | 60 | 506020 | 506030 | 506035 | 506040 | 506050 | 506060 | 506070 | |
| | | 62 | | 506230 | 506235 | 506240 | 506250 | 506260 | 506270 | |
| | | 65 | | 506530 | | 506540 | 506550 | 506560 | 506570 | |
| 55 | +0.030 +0.011 | 70 | | 557030 | 557035 | 557040 | 557050 | 557060 | 557070 | |
| 60 | | | 607430 | 607435 | 607440 | 607450 | 607460 | 607470 | | |
| 63 | | | 607530 | 607535 | 607540 | 607550 | 607560 | 607570 | | |
| 65 | +0.060 +0.030 | 75 | | | | | | 637560 | 637570 | |
| 65 | | | | | 658040 | 658050 | 658060 | 658070 | | |
| 70 | | | | 708530 | 708535 | 708540 | 708550 | 708560 | 708570 | |
| 75 | +0.071 +0.036 | 80 | | | | | 709050 | 709060 | 709070 | |
| 75 | | | | | | 759050 | 759060 | 759070 | | |
| 80 | | | | | | 759550 | 759560 | 759570 | | |
| 85 | +0.035 +0.013 | 90 | | | | 809640 | 809650 | 809660 | 809670 | |
| 85 | | | | | 8010040 | | 8010060 | 8010070 | | |
| 90 | | | | | | | | 8510060 | | |
| 90 | +0.040 +0.015 | 100 | | | | | 9011050 | 9011060 | | |
| 95 | | | | | | | 10012050 | 10012060 | 10012070 | |
| 100 | | | | | | | 11013050 | | 11013070 | |
| 110 | +0.083 +0.043 | 120 | | | | | | | 12014070 | |
| 110 | | | | | | | | | | |
| 120 | | | | | | | | | | |
| 125 | +0.046 +0.017 | 130 | | | | | | | | |
| 130 | | | | | | | | | | |
| 140 | | | | | | | | | | |
| 140 | +0.083 +0.043 | 150 | | | | | | | | |
| 150 | | | | | | | | | | |
| 160 | | | | | | | | | | |
| 160 | +0.096 +0.050 | 170 | | | | | | | | |
| 170 | | | | | | | | | | |
| 180 | | | | | | | | | | |
| 180 | +0.046 +0.017 | 190 | | | | | | | | |
| 190 | | | | | | | | | | |
| 190 | | | | | | | | | | |
| 190 | +0.096 +0.050 | 200 | | | | | | | | |
| 200 | | | | | | | | | | |
| 200 | | | | | | | | | | |

JDB Metric Cylindrical Oiles Bearing

| | |
|----------|--------------------|
| Material | CuZn25Al5+Graphite |
| 材质 | 高力黄铜+石墨 |

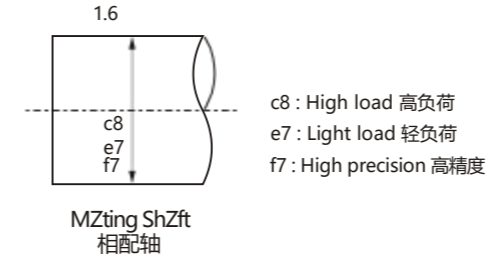

Unit(单位): mm

| L ^{-0.1} _{-0.3} | | | | | | | | I.D. After Press-Fitting 压装后内孔 | JTW 适用垫片 | I.D. ∅ d 内径 |
|-----------------------------------|----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------------------------------|-------------|----------------|
| 80 | 90 | 100 | 120 | 130 | 140 | 150 | 200 | | | |
| 506080 | | | | | | | | +0.045 +0.020 | 50 | 50 |
| 506280 | | | | | | | | | | |
| 506580 | | 5065100 | | | | | | | | |
| 607480 | | | | | | | | +0.055 +0.025 | 55 | 55 |
| 607580 | | 6075100 | | | | | | | | |
| 637580 | | | | | | | | | | |
| 658080 | | | | | | | | +0.054 +0.024 | 60 | 60 |
| 708580 | | 7085100 | | | | | | | | |
| 709080 | | | | | | | | | | |
| 759080 | | 7590100 | | | | | | +0.054 +0.024 | 65 | 63 |
| 759580 | | 7595100 | | | | | | | | |
| 809680 | | 8096100 | 8096120 | | | | | | | |
| 8010080 | | 80100100 | 80100120 | | 80100140 | | | +0.065 +0.030 | 70 | 70 |
| 8510080 | | | | | | | | | | |
| 9011080 | 9011090 | 90110100 | 90110120 | | | | | | | |
| 10012080 | 10012090 | 100120100 | 100120120 | | 100120140 | | | +0.064 +0.029 | 75 | 75 |
| 11013080 | | 110130100 | 110130120 | | | | | | | |
| 12014080 | 12014090 | 120140100 | 120140120 | | 120140140 | | | | | |
| | | 125145100 | 125145120 | | | | | +0.076 +0.036 | 80 | 80 |
| 13015080 | | 130150100 | | 130150130 | | | | | | |
| | | 140160100 | | | 140160140 | | | | | |
| 15017080 | | 150170100 | | | | 150170150 | | +0.076 +0.036 | — | 85 |
| 16018080 | | 160180100 | | | | 160180150 | | | | |
| | | 170190100 | | | | 170190150 | | | | |
| | | 180200100 | | | | 180200150 | | +0.088 +0.042 | 90 | 90 |
| | | 190210100 | | | | 190210150 | | | | |
| | | | | | | 200230150 | 200230200 | | | |

※压入后内孔公差值做参考。
The ID tolerance after fitting is for reference